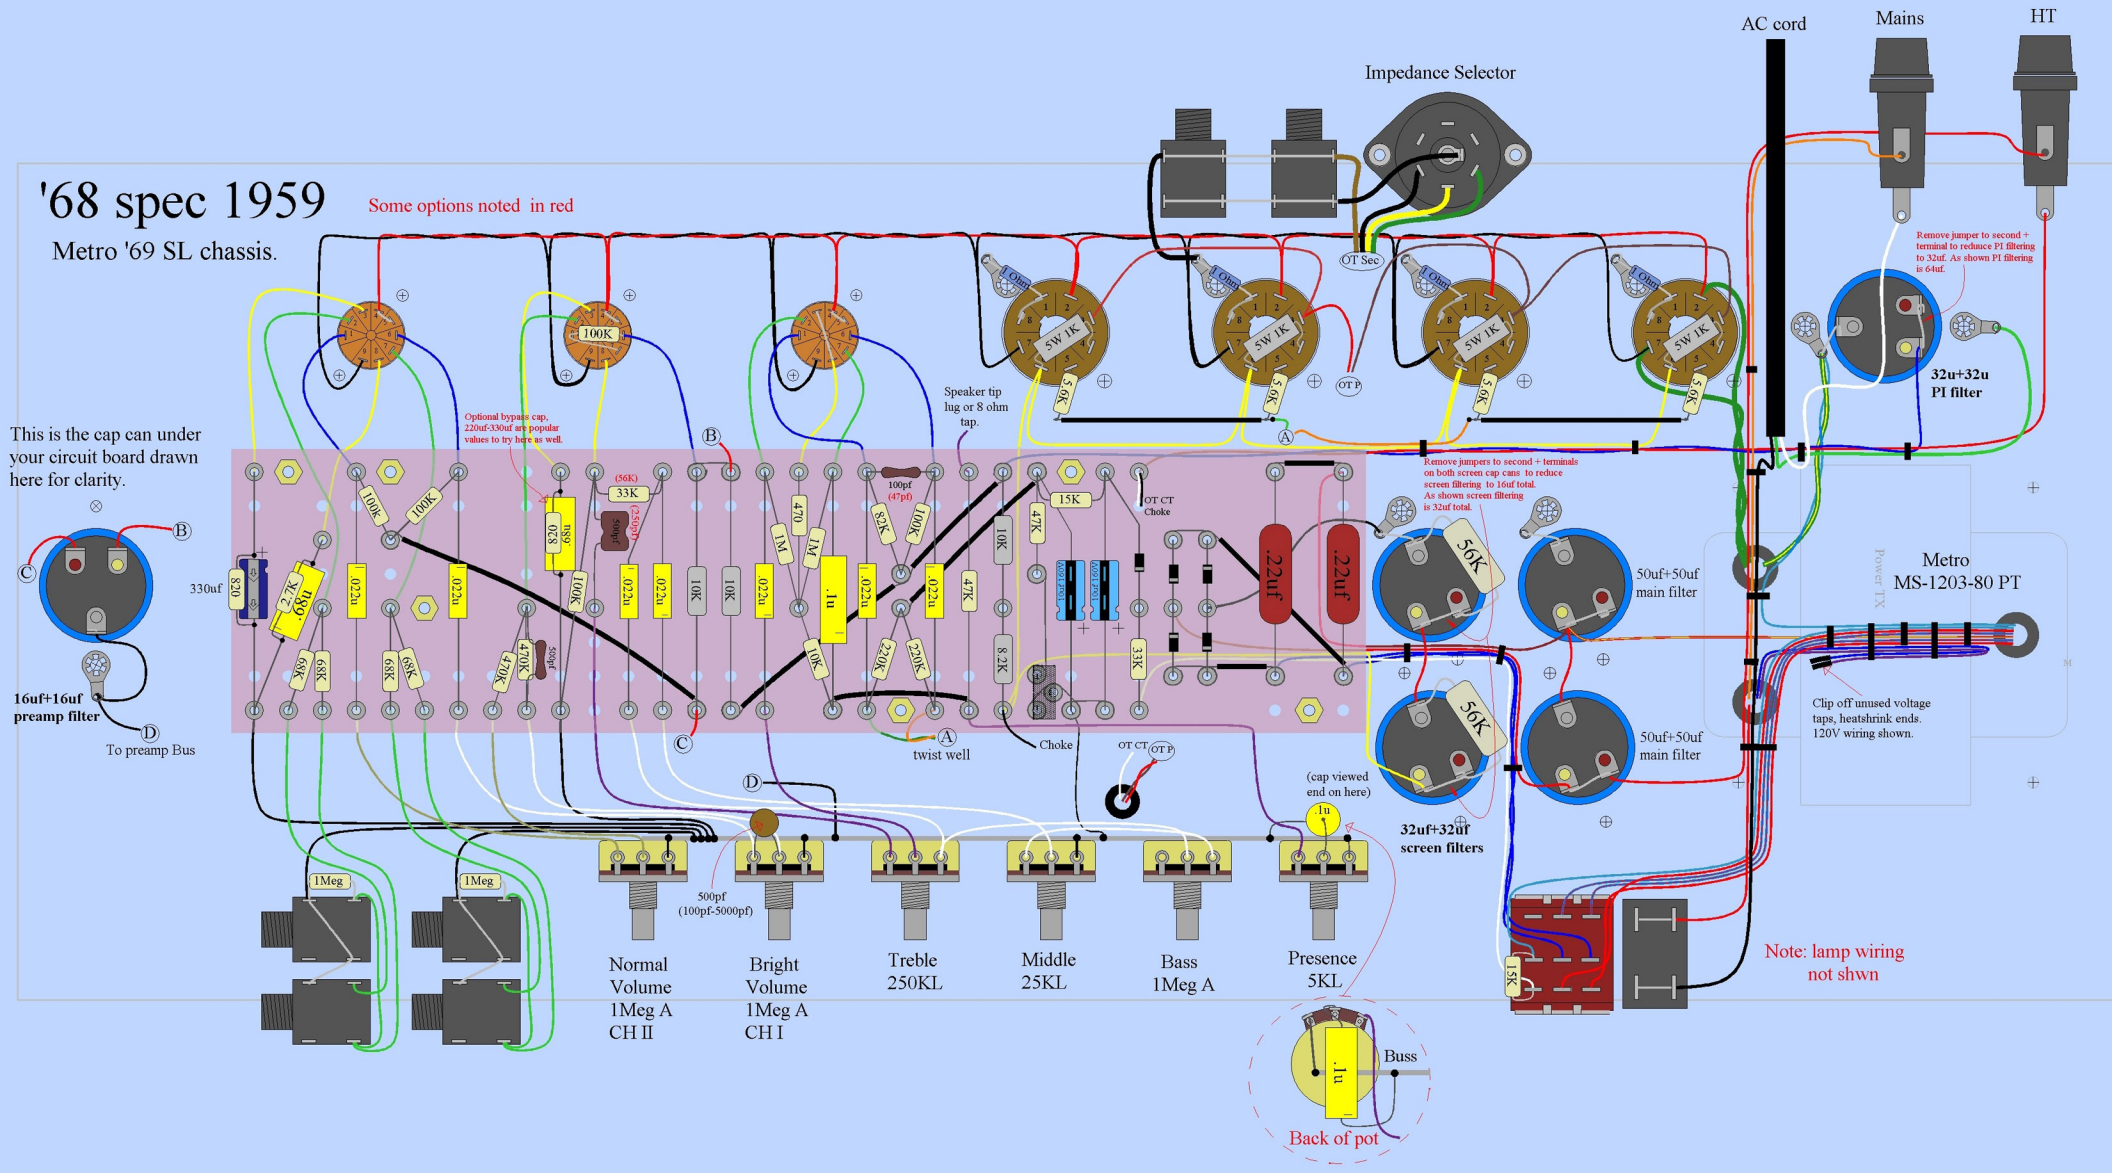
'68 spec 1959
Some options noted in red
Metro '69 SL chassis.
This is the cap can under your circuit board drawn here for clarity.
16uf+16uf preamp filter
To preamp Bus
330uf
Optional bypass cap, 220uf-330uf are popular values to try here as well.
Speaker tip lug or 8 ohm tap.
twist well
Choke
OT CT
OT P
OT Sec
Impedance Selector
AC cord
Mains
HT
Remove jumper to second + terminal to reduce PI filtering to 32uf. As shown PI filtering is 64uf.
32u+32u PI filter
Remove jumpers to second + terminals on both screen cap cans to reduce screen filtering to 16uf total. As shown screen filtering is 32uf total.
50uf+50uf main filter
50uf+50uf main filter
32uf+32uf screen filters
Metro MS-1203-80 PT
Power TX
Clip off unused voltage taps, heatshrink ends. 120V wiring shown.
Note: lamp wiring not shwn
(cap viewed end on here)
Normal Volume 1Meg A CH II
Bright Volume 1Meg A CH I
Treble 250KL
Middle 25KL
Bass 1Meg A
Presence 5KL
500pf (100pf-5000pf)
Buss
Back of pot